



### 30A Smart WiFi Switch

## USER MANUAL


### App Configuration

Scan following QR code to download and install "Smart Life - Smart Living" app from PlayStore or AppStore




While installing app, make sure to **Allow** all the permissions asked. Otherwise, smart switch will not connect with app and work properly.

As shown in the **Fig.1.0**, connect your smartphone with 2.4Ghz Wi-Fi network, Turn on Bluetooth & GPS/Location.



Enter your Wi-Fi credentials when asked and click **NEXT**



App will start configuring smart switch with Wi-Fi Network



## READ BEFORE YOU START

1. Installation must be carried out by qualified electrician with basic knowledge of Wi-Fi network & Smartphone.
2. Keep the device out of reach of children.
3. Keep the device away from water damp or fire.
4. Do not use as a mains switch to operate supply to whole house.
5. Smart switch supports only 2.4Ghz Wi-Fi network, make sure your mobile is connected with 2.4Ghz network only.
6. DO NOT attempt to disassemble, repair or modify the device. This will void device warranty.
7. Manufacturer/seller will not be responsible for any kind of Short Circuit/Fire/Injury occurred due to incorrect wiring or inappropriate use of this smart switch.




Fig. 1.0


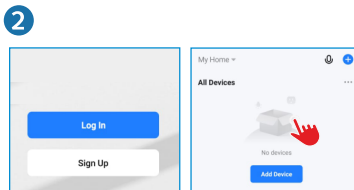


Fig. 1.2

Fig. 1.3

As shown in **Fig.1.2** Register & login to Smart Life app. then click **+** or **Add Device** as guided in **Fig.1.3**



Click **DONE** when device pairing completed successfully. Your smart touch switch will now visible in smart life app. Click on edit button to change name of smart switch.

### Smart Life App Widget

You can add Smart Life widget on your smart phone home screen to turn ON/OFF smart switch with 1 touch.

### Setup Video QR Link




Scan this QR code to watch detailed setup video of the product or visit [youtube.com/@finerysmart](https://www.youtube.com/@finerysmart)

Follow us on :

- [youtube.com/@finerysmart](https://www.youtube.com/@finerysmart)
- [instagram.com/finerysmarthome](https://www.instagram.com/finerysmarthome)
- [facebook.com/finerysmarthome](https://www.facebook.com/finerysmarthome)



**NOTE :** If the Red LED is continuously ON, then press and hold reset button for 5 seconds until LED starts blinking to turn ON "App Pairing Mode"



Smart Life app will automatically popup screen to ADD device. Click on **Add** button. It will start pairing app with device and takes 20-180 seconds to complete the setup. (Pairing time depends on network)



### Quality & Support Assurance


Every WiFi Switch is tested before packing & dispatch. If you face any issue while using WiFi Switch e.g. Not able to understand wiring or connecting with Wi-Fi network, kindly contact us on our WhatsApp support number provided below before returning or replacing the product for easy processing. We provide 100% refund/replacement if issue with WiFi switch is not resolved.

### WHATSAPP SUPPORT

**+91 75592 39386**


(Mon-Sat, 10:00 AM to 6:00 PM)

## Wiring for AC or Geyser

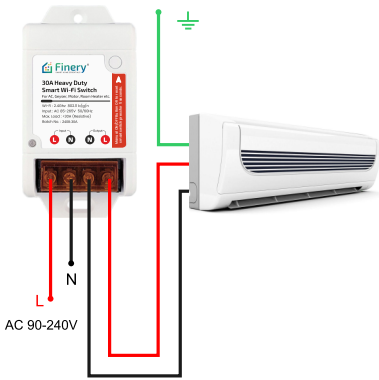


Connect Neutral & Line from output of switch to AC (Max 1 Ton) connect earthing directly with to AC.

## Wiring for starter-less Pump

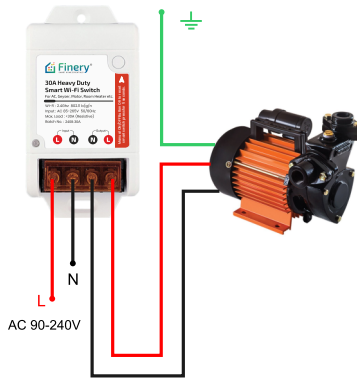

Connect Neutral & Line from output of switch to pump and connect earthing directly with the pump

## 1-PH pump with Auto starter

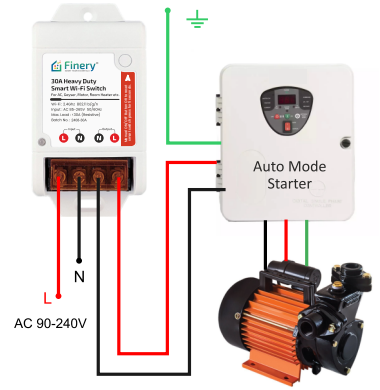

Connect Neutral & Line from output of switch to starter and connect earthing directly with the starter

## Wiring for 1-Phase pump with Manual Starter


### 1-Phase Starter

If you have 1-Phase water pump starter without auto mode where you need to press GREEN starter button every time you want to start the pump then you will additionally require Auto Switch.


### Why Auto Switch?

Your starter needs Start button to be pressed while starting the motor. To automate this action you will need Auto Switch to start the pump automatically when smart switch supplies the power to starter & auto switch.


Refer the generic wiring diagram of smart switch along with auto switch

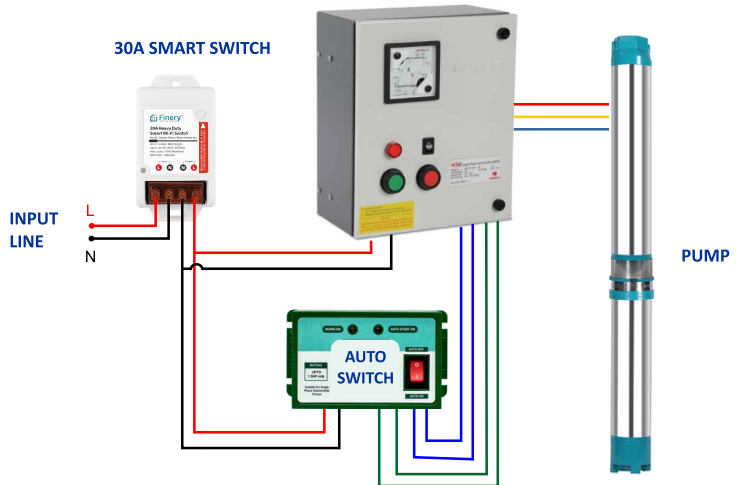

## Smart Life App Features

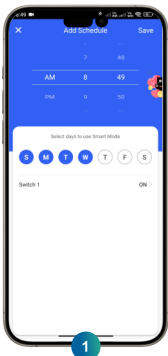


**Add Schedule**  
To add ON & OFF timing for various days of the week.

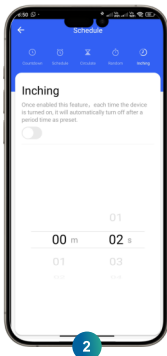


**Inching**  
To set the CUT-OFF timing of smart switch whenever it's turned ON



**Random**  
With Start and end time you can set random ON-OFF

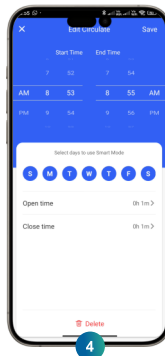

**Circulate**  
With Start & end time you can repeat the ON-OFF time with specific time

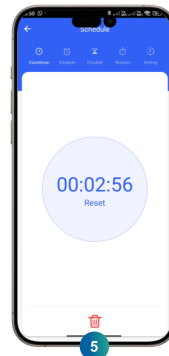

**Countdown**  
Simple countdown timer to turn OFF the smart switch after specific time.



**Power Recovery**  
In Relay Status setting you can select status of the switch you want to retain after powercut.