



63A Smart WiFi Switch with Power Monitoring & Protection

USER MANUAL

App Configuration

Scan following QR code to download and install "Smart Life - Smart Living" app from PlayStore or AppStore



While installing app, make sure to **Allow** all the permissions asked. Otherwise, smart switch will not connect with app and work properly.

As shown in the **Fig.1.0**, connect your smartphone with 2.4Ghz Wi-Fi network, Turn on Bluetooth & GPS/Location.

⚠️ READ BEFORE YOU START

1. Installation must be carried out by qualified electrician with basic knowledge of Wi-Fi network & Smartphone.
2. Keep the device out of reach of children.
3. Keep the device away from water damp or fire.
4. Do not use as a mains switch to operate supply to whole house.
5. Smart switch supports only 2.4Ghz Wi-Fi network, make sure your mobile is connected with 2.4Ghz network only.
6. DO NOT attempt to disassemble, repair or modify the device. This will void device warranty.
7. Manufacturer/seller will not be responsible for any kind of Short Circuit/Fire/Injury occurred due to incorrect wiring or inappropriate use of this smart switch.



Fig. 1.0

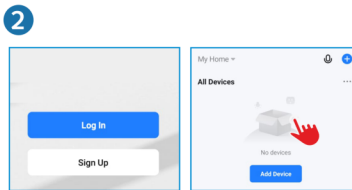


Fig. 1.2



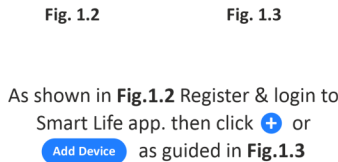


Fig. 1.3


As shown in **Fig.1.2** Register & login to Smart Life app. then click **+** or **Add Device** as guided in **Fig.1.3**

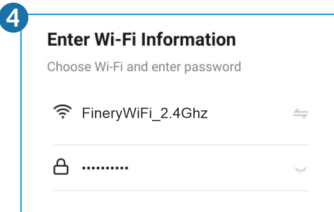

Enter your Wi-Fi credentials when asked and click **NEXT**

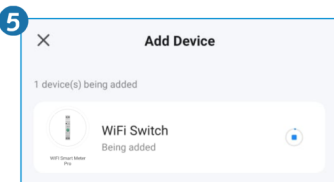

App will start configuring smart switch with Wi-Fi Network

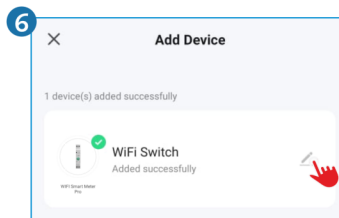

Click **DONE** when device pairing completed successfully. Your smart touch switch will now visible in smart life app. Click on edit button to change name of smart switch.

Smart Life App Widget

You can add Smart Life widget on your smart phone home screen to turn ON/OFF smart switch with 1 touch.

Setup Video QR Link




Scan this QR code to watch detailed setup video of the product or visit [youtube.com/@finerysmart](https://www.youtube.com/@finerysmart)

Follow us on :

- [youtube.com/@finerysmart](https://www.youtube.com/@finerysmart)
- [instagram.com/finerysmarthome](https://www.instagram.com/finerysmarthome)
- [facebook.com/finerysmarthome](https://www.facebook.com/finerysmarthome)



NOTE : If the Blue LED is continuous ON, then press and hold GREEN power button for 5 seconds until LED starts blinking to turn ON "App Pairing Mode"

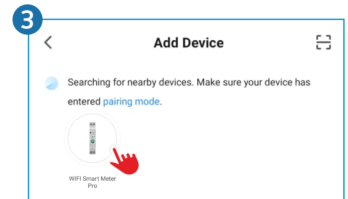

Smart Life app will automatically popup screen to ADD device. Click on **Add** button. It will start pairing app with device and takes 20-180 seconds to complete the setup. (Pairing time depends on network)



Quality & Support Assurance

Every WiFi Switch is tested before packing & dispatch. If you face any issue while using WiFi Switch e.g. Not able to understand wiring or connecting with Wi-Fi network, kindly contact us on our WhatsApp support number provided below before returning or replacing the product for easy processing. We provide 100% refund/replacement if issue with WiFi switch is not resolved.


WHATSAPP SUPPORT

+91 75592 39386

(Mon-Sat, 10:00 AM to 6:00 PM)

Wiring for EV Charger


Input : AC 90-240V

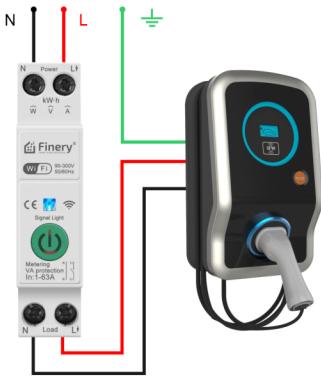

Connect Neutral & Line from output of switch to charger and connect earthing directly with the charger.

Wiring for starter-less Pump


Input : AC 90-240V

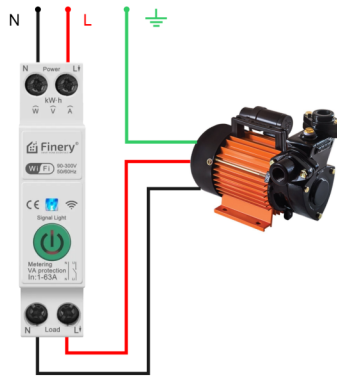

Connect Neutral & Line from output of switch to pump and connect earthing directly with the pump

1-PH pump with Auto starter

Input : AC 90-240V

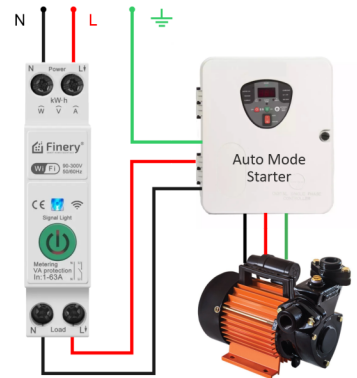

Connect Neutral & Line from output of switch to starter and connect earthing directly with the starter

Wiring for 1-Phase or 3-Phase pump without Auto / Bypass Mode

1-Phase Starter


If you have 1-Phase water pump starter without auto mode then you will additionally require Auto Switch.

3-Phase Starter


Similarly, If you are using 3-Phase motor starter without Auto mode then you will need additional Auto Switch & 3-Pole contactor to operate your pump with smart switch.

Why Auto Switch?

Your starter needs Start button to be pressed while starting the motor. To bypass this action you will need Auto Switch to start the pump when smart switch supplies the power to starter.

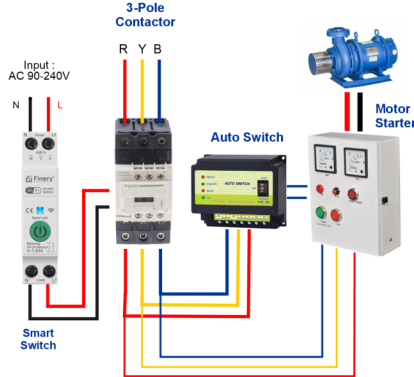

Maintenance Lock Mode

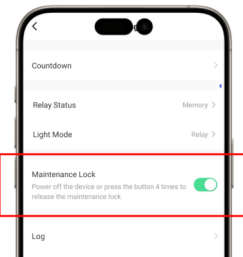

To avoid accidents, the must have feature for high load devices is **MAINTENANCE LOCK**.

As an additional safety feature, when Maintenance Lock is tuned ON. Switch cannot be turned ON unless maintenance mode is disabled in app or pressing the power button 4 times to disable maintenance mode.


Various app features



You can monitor Total power consumption & Today's power consumption, Voltage & Current.




Monitor Total power consumption by selecting Day, Month & Year to optimize your utility bill

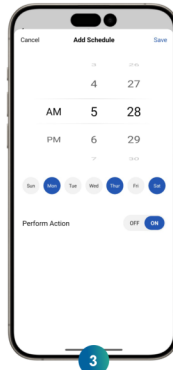


With timer function you can set ON/OFF timers for selected days of the week.



In Relay Status setting you can select status of the switch you want to retain after powercut.

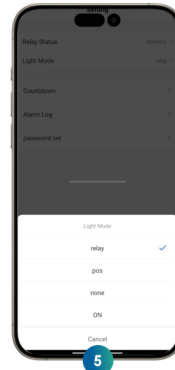

In light mode setting you can choose how LED indicator will glow depending upon status of the smart switch.

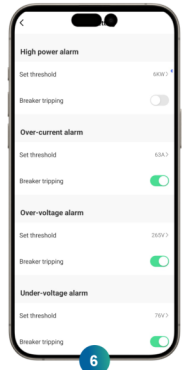

Under the Log section you can view complete Log of switch ON & OFF with day & time.